


LANGOFLEX PPS



LANGOFLEX PPS



Mechanical & Abrasion Protection



Expandable Sleeving



Braided



PPS .010" (0.25 mm) monofilament



Standard: Black
Option: Tracer



Low: -40°C (-40°F)
High: 200°C (392°F)




High temperature endurance

PHYSICAL PROPERTIES

Physical properties	Spec	Value
Operating temperature	-	-40/200°C (-40/392°F)
Peak temperature	-	225°C (437°F)
Abrasion resistance	ISO 6722	> 3 000 cycles
Flammability	FMVSS 302	0 mm/min
Chemical resistance	Resists the majority of chemicals and automotive fluids	

DIMENSIONS

Designation	Nominal Ø (inches)	Nominal Ø (mm)	Maximum Ø (mm)
LANGOFLEX PPS 03	1/8"	3	6
LANGOFLEX PPS 04	11/64"	4	8
LANGOFLEX PPS 05	3/16"	5	9
LANGOFLEX PPS 06	1/4"	6	11
LANGOFLEX PPS 08	5/16"	8	13
LANGOFLEX PPS 10	3/8"	10	17
LANGOFLEX PPS 12	1/2"	12	17
LANGOFLEX PPS 14	9/16"	14	22
LANGOFLEX PPS 16	5/8"	16	25
LANGOFLEX PPS 18	5/7"	18	24
LANGOFLEX PPS 20	4/5"	20	27
LANGOFLEX PPS 22	7/8"	22	32
LANGOFLEX PPS 25	1"	25	34
LANGOFLEX PPS 30	1 1/6"	30	37
LANGOFLEX PPS 35	1 3/8"	35	50
LANGOFLEX PPS 40	1 4/7"	40	42
LANGOFLEX PPS 50	2"	50	80
LANGOFLEX PPS 70	2 3/4"	70	80

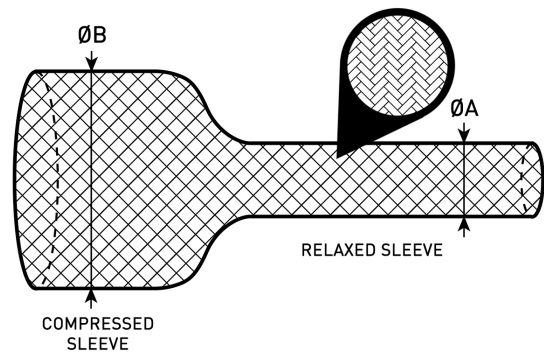

PACKAGING

Coils
Cut lengths upon request