

# NU-WRAP PA



## NU-WRAP PA



Mechanical & Abrasion Protection  
Noise Reduction



Tubular, Wrappable & Shrinkable Sleeving




Woven band



Polyamide multifilament



Standard:           Black



Low:                   -40°C (-40°F)  
High:                  125°C (257°F)




Excellent mechanical performance  
Wire bundles in flat position

## PHYSICAL PROPERTIES

Physical properties	Spec	Value
Operating temperature	-	-40/125°C [-40/257°F]
Abrasion resistance	SAE ARP 1536	> 3 000 000 cycles
Flammability	FMVSS 302 SAE J 369	self-extinguishing
Chemical resistance	Resists the majority of chemicals and automotive fluids	

## DIMENSIONS

Designation	Nominal Ø (ID) (inches)	Nominal Ø (ID) (mm)
NU-WRAP PA 13	1/2"	13
NU-WRAP PA 16	5/8"	16
NU-WRAP PA 19	3/4"	19
NU-WRAP PA 25	1"	25
NU-WRAP PA 32	1 1/4"	32
NU-WRAP PA 38	1 1/2"	38
NU-WRAP PA 51	2"	51

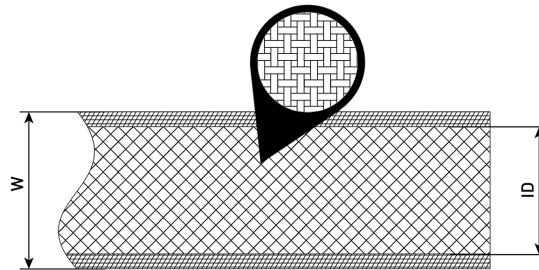

## PACKAGING

Spools  
Bulk spools  
Cut to length (1/2" and under)