

# LANGOFLEX HD



## LANGOFLEX HD



Mechanical & Abrasion Protection



Expandable Sleeving



Braided



Polyester monofilament



Standard:           Black



Low:                   -40°C (-40°F)  
High:                  150°C (302°F)




Extreme abrasion resistance

## PHYSICAL PROPERTIES

Physical properties	Spec	Value
Operating temperature	-	-40/150°C (-40/302°F)
Peak temperature	-	175°C (347°F)
Abrasion resistance	SAE ARP 1536	> 200 000 cycles
Flammability	FMVSS 302 SAE J 369	self-extinguishing
Chemical resistance	Resists the majority of chemicals and automotive fluids	

## DIMENSIONS

Designation	Nominal A Ø (inches)	Nominal A Ø (mm)	Maximum B Ø (mm)
LANGOFLEX HD 10	3/8"	10	19
LANGOFLEX HD 16	5/8"	16	24
LANGOFLEX HD 25	1"	25	34
LANGOFLEX HD 38	1 1/2"	38	50
LANGOFLEX HD 50	2"	50	76
LANGOFLEX HD 76	3"	76	114

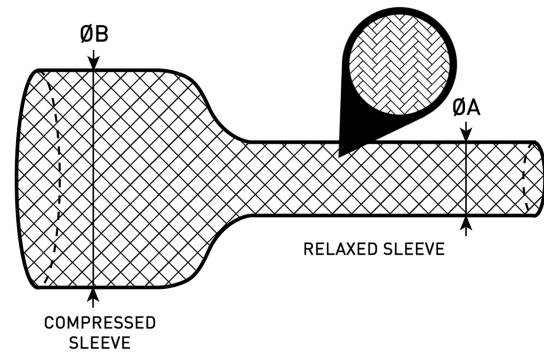

## PACKAGING

Coils  
Cut lengths upon request