

# NU-SHIELD FG2A



## NU-SHIELD FG2A



Radiant Heat Protection



Reflective Sleeving & Heat Shield




Woven



Fiberglass woven  
Aluminized foil  
Sensitive adhesive



Standard: Silver




Low: -40°C (-40°F)  
High: 175 (347°F)



100% customized shape


## PHYSICAL PROPERTIES

Physical properties	Spec	Value
Surface mass	-	361 g/m <sup>2</sup>
Operating temperature	-	-40/175°C (-40/347°F)
Flammability	FMVSS 302	self-extinguishing
Thermal effectiveness	SAE J2302	see graph

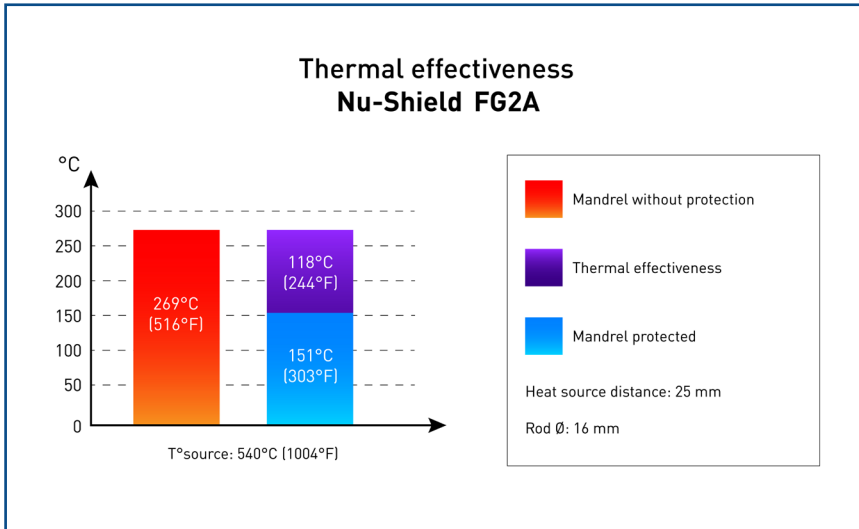

## DIMENSIONS

Sizes and diameters depend on the protection need.

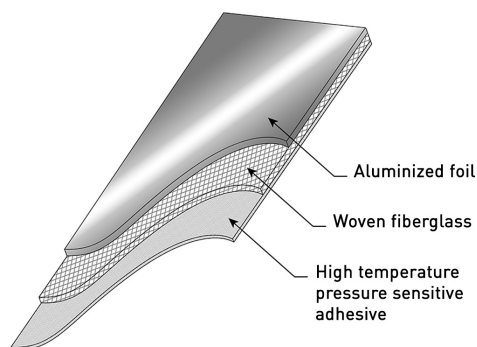

## PACKAGING

Complex shapes  
Cut lengths (die or kiss cutting)