

NU-SHIELD NW



Thermal Protection
Radiant Heat Protection



Reflective Sleaving & Heat Shield



Non-woven carbon fiber based



Aluminized foil fiberglass reinforced



Standard: Black (non-woven), silver (foil)




High: 250°C (482°F)



100% customized shape


PHYSICAL PROPERTIES

Physical properties	Spec	Value
Surface mass	-	850 g/m ²
Operating temperature	-	up to 250°C (482°F)
Flammability	FMVSS 302	does not ignite (DNI)
Thermal resistance	ASTM E 1530 @ 20°C	0.0535 m ² .K/W

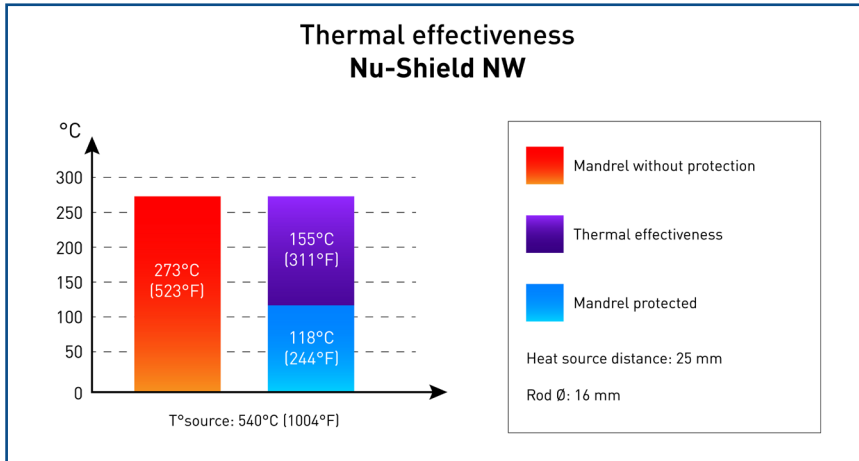

DIMENSIONS

Sizes and diameters depend on the protection need.

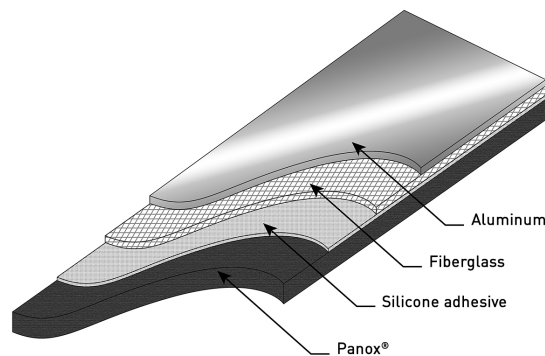

PACKAGING

Complex shapes
Cut lengths (die or kiss cutting)