

NU-SHRINK



## NU-SHRINK



Mechanical & Abrasion Protection  
Noise Reduction



Tubular, Wrappable & Shrinkable Sleeving



Woven



Modified polyethylene monofilament  
Polyester multifilament



Standard:           Black



Low:                   -40°C (-40°F)  
High:                  125°C (257°F)




Heat-shrinkable protection  
Anti-fraying finish

## PHYSICAL PROPERTIES

Physical properties	Spec	Value
Operating temperature	-	-40/125°C [-40/257°F]
Peak temperature	-	150°C (302°F)
Abrasion resistance	SAE ARP 1536	> 900 000 cycles
Flammability	FMVSS 302 SAE J 369	self-extinguishing
Chemical resistance	Resists the majority of chemicals and automotive fluids	

## DIMENSIONS

Designation	Size before shrinkage (W) (inches)	Size before shrinkage (W) (mm)	Recommended application range (ID) (mm)	
			Min.	Max.
NU-SHRINK 06 - 03	1/4"	6	3	4
NU-SHRINK 12 - 06	1/2"	12	6	8
NU-SHRINK 20 - 10	3/4"	20	10	13
NU-SHRINK 25 - 12	1"	25	12	16
NU-SHRINK 30 - 15	1 3/16"	30	15	19
NU-SHRINK 34 - 17	1 11/32 "	34	17	22
NU-SHRINK 40 - 20	1 37/64"	40	20	26
NU-SHRINK 50 - 25	2"	50	25	32
NU-SHRINK 60 - 30	2 23/64"	60	30	39
NU-SHRINK 70 - 35	2 3/4"	70	35	45
NU-SHRINK 80 - 40	3 5/32"	80	40	52
NU-SHRINK 90 - 45	3 35/64"	90	45	58
NU-SHRINK 100 - 50	4"	100	50	65
NU-SHRINK 110 - 55	4 21/64"	110	55	71

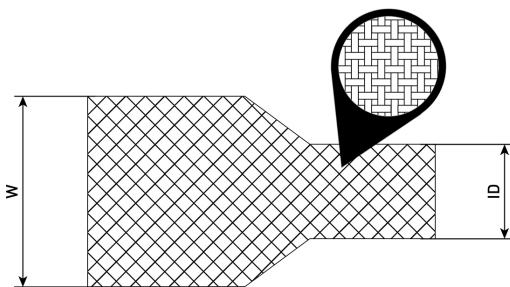

## PACKAGING

Coils  
Cut lengths upon request