



SIB-TEC LF LEAD FREE cable gland + locknuts

Presse étoupe SIB-TEC LF LEAD FREE + contre-écrous

IP PROTECTION :
IP 66 / 68 – 4X

OPERATING TEMPERATURE :
-40 °C / +100 °C

SPECIAL FEATURES :

- For Single Wire braid
- Reduced sealing available
- O-ring included

MATERIAL :

- Nickel-plated CW 510L < 0,1 % lead
- Sealing : neoprene
- O-ring : nitrile
- Insert : polyamide 6

THREAD :
Metric, PG, NPT

CERTIFICATIONS :

- IEC 62 444
- VDE : 40048931

ACCESSORIES AVAILABLE :
See accessories

INDICE DE PROTECTION :
IP 66 / 68 – 4X

PLAGE DE TEMPÉRATURE :
-40 °C / +100 °C

AVANTAGES TECHNIQUES :

- Pour câble à tresse
- Garnitures réductrices disponibles
- Joint inclus

MATIÈRE :


- Laiton nickelé CW 510L < 0,1 % de plomb
- Garniture : néoprène
- Joint torique : nitrile
- Insert : polyamide 6

FILETAGE :
Métrique, PG, NPT

CERTIFICATIONS :

- IEC 62 444
- VDE : 40048931

ACCESSOIRES DISPONIBLES :
Voir page des accessoires

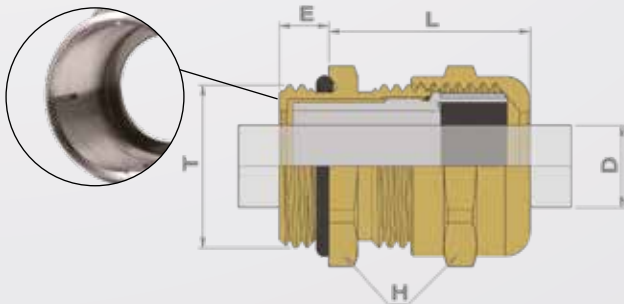

SIB-TEC LF LEAD FREE

	Thread T	Part Number	Overall cable diameter D		H	E	L	Packing
			Min	Max				
Metric	12	110020501	2,5	6,5	14	5,0	20,0	50
	16	110020502	4,0	9,5	17	5,0	23,0	50
	20	110020503	7,0	13,0	22	6,0	26,0	50
	25	110020504	8,0	16,0	27	7,0	28,0	25
	32	110020505	11,0	21,0	34	8,0	30,0	20
	40	110020506	15,0	27,0	42	8,0	33,0	10
	50	110020507	22,0	35,0	55	9,0	37,0	5
Metric RED*	63	110020508	35,0	48,0	65	10,0	44,0	5
	12	110020509	1,5	5,0	14	5,0	20,0	50
	16	110020510	2,5	7,0	17	5,0	23,0	50
	20	110020511	4,0	10,0	22	6,0	26,0	50
	25	110020512	5,0	13,0	27	7,0	28,0	25
	32	110020513	7,0	17,0	34	8,0	30,0	20
	40	110020514	10,0	22,0	42	8,0	33,0	10
	50	110020515	17,0	29,0	55	9,0	37,0	5
	63	110020516	28,0	40,0	65	10,0	44,0	5

*RED : Reduced sealing / Garniture réductrice



LOCKNUTS LF LEAD FREE

	Thread T	Part Number	H	E	Packing
Metric	12	120010038	15	3,0	50
	16	120010039	20	3,0	50
	20	120010040	24	3,5	50
	25	120010041	30	3,5	25
	32	120010042	35	4,5	20
	40	120010043	45	4,5	20
	50	120010044	55	5,5	10
	63	120010045	70	6,0	5