

SIB-TEC cable gland

Presse étoupe SIB-TEC



STAINLESS STEEL

IP PROTECTION :

IP 66 / 68

OPERATING TEMPERATURE :

-40 °C / +100 °C

SPECIAL FEATURES :

- Reduced sealing available (RED*)
- O-ring included
- EMC tested

MATERIAL :

- Stainless steel 316L-1.4404-V4A
- Available in nickel-plated brass
- Seal : neoprene
- O-ring : nitrile
- Insert : PA6

THREAD :

Metric, PG, NPT

CERTIFICATIONS :

- IEC 62 444
- DNV : TAE00004KD

ACCESSORIES AVAILABLE :

See accessories

INDICE DE PROTECTION :

IP 66 / 68

PLAGE DE TEMPÉRATURE :

-40° C / +100° C

AVANTAGES TECHNIQUES :

- Garnitures réductrices disponibles (RED*)
- Joint torique inclus
- Testé CEM

MATIÈRE :

- Inox 316L-1.4404-V4A
- Disponible en laiton nickelé
- Garniture : néoprène
- Joint torique : nitrile
- Insert : PA6

FILETAGE :


Métrique, PG, NPT

CERTIFICATIONS :

- IEC 62 444
- DNV : TAE00004KD

ACCESSOIRES DISPONIBLES :

Voir page des accessoires

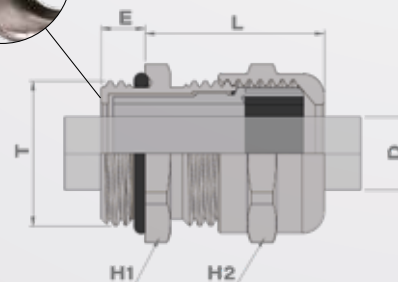

| | Thread T | Part Number | Overall cable diameter D | | H1 | H2 | E | L | Packing | | Thread T | Part Number | E | Packing | | | | | |
|-------------|----------|-------------|--------------------------|------|----|----|------|------|---------|------------------|----------|-------------|------|---------|----|----|------|------|----|
| | | | Min | Max | | | | | | | | | | | | | | | |
| Metric | 12 | C5212105 | 4,5 | 6,5 | 14 | 15 | 5,0 | 20,0 | 50 | Metric Long | 12 | C5312105 | 15,0 | 50 | | | | | |
| | 16 | C5216105 | 5,0 | 9,5 | 19 | 19 | 5,0 | 23,0 | 50 | | 16 | C5316105 | 15,0 | 50 | | | | | |
| | 20 | C5220105 | 8,0 | 13,0 | 22 | 22 | 6,0 | 26,0 | 50 | | 20 | C5320105 | 15,0 | 50 | | | | | |
| | 25 | C5225105 | 9,0 | 16,0 | 30 | 29 | 7,0 | 28,0 | 25 | | 25 | C5325105 | 15,0 | 25 | | | | | |
| | 32 | C5232105 | 12,0 | 21,0 | 36 | 36 | 8,0 | 30,0 | 20 | | 32 | C5332105 | 15,0 | 20 | | | | | |
| | 40 | C5240105 | 16,0 | 27,0 | 46 | 42 | 8,0 | 33,0 | 10 | | 40 | C5340105 | 15,0 | 10 | | | | | |
| | 50 | C5250105 | 23,0 | 35,0 | 55 | 55 | 9,0 | 37,0 | 5 | | 50 | C5350105 | 15,0 | 5 | | | | | |
| | 63 | C5263105 | 36,0 | 48,0 | 65 | 65 | 10,0 | 44,0 | 5 | 63 | C5363105 | 15,0 | 5 | | | | | | |
| Metric RED* | 12 | C5212145 | 3,5 | 5,0 | 14 | 15 | 5,0 | 20,0 | 50 | Metric Long RED* | 12 | C5312145 | 15,0 | 50 | | | | | |
| | 16 | C5216145 | 4,0 | 7,0 | 19 | 19 | 5,0 | 23,0 | 50 | | 16 | C5316145 | 15,0 | 50 | | | | | |
| | 20 | C5220145 | 5,0 | 10,0 | 22 | 22 | 6,0 | 26,0 | 50 | | 20 | C5320145 | 15,0 | 50 | | | | | |
| | 25 | C5225145 | 6,0 | 13,0 | 30 | 29 | 7,0 | 28,0 | 25 | | 25 | C5325145 | 15,0 | 25 | | | | | |
| | 32 | C5232145 | 8,0 | 17,0 | 36 | 36 | 8,0 | 30,0 | 20 | | 32 | C5332145 | 15,0 | 20 | | | | | |
| | 40 | C5240145 | 11,0 | 22,0 | 46 | 42 | 8,0 | 33,0 | 10 | | 40 | C5340145 | 15,0 | 10 | | | | | |
| | 50 | C5250145 | 18,0 | 29,0 | 55 | 55 | 9,0 | 37,0 | 5 | | 50 | C5350145 | 15,0 | 5 | | | | | |
| | 63 | C5263145 | 29,0 | 40,0 | 65 | 65 | 10,0 | 44,0 | 5 | 63 | C5363145 | 15,0 | 5 | | | | | | |
| PG | 07 | C5007105 | 2,5 | 6,5 | 14 | 15 | 5,0 | 20,0 | 50 | PG RED* | 07 | C5007145 | 1,5 | 5,0 | 14 | 15 | 5,0 | 20,0 | 50 |
| | 09 | C5009105 | 4,0 | 9,5 | 17 | 19 | 6,0 | 23,0 | 50 | | 09 | C5009145 | 2,5 | 7,0 | 17 | 19 | 6,0 | 23,0 | 50 |
| | 11 | C5011105 | 6,0 | 11,5 | 21 | 21 | 6,0 | 24,0 | 50 | | 11 | C5011145 | 3,0 | 8,5 | 21 | 21 | 6,0 | 24,0 | 50 |
| | 13 | C5013105 | 7,0 | 13,0 | 23 | 22 | 6,5 | 26,0 | 50 | | 13 | C5013145 | 4,0 | 10,0 | 23 | 22 | 6,5 | 26,0 | 50 |
| | 16 | C5016105 | 8,0 | 15,0 | 24 | 26 | 6,5 | 27,5 | 50 | | 16 | C5016145 | 5,0 | 12,0 | 24 | 26 | 6,5 | 27,5 | 50 |
| | 21 | C5021105 | 11,0 | 19,0 | 30 | 30 | 7,0 | 28,0 | 20 | | 21 | C5021145 | 8,0 | 16,0 | 30 | 30 | 7,0 | 28,0 | 20 |
| | 29 | C5029105 | 16,0 | 26,0 | 41 | 41 | 8,0 | 30,0 | 20 | | 29 | C5029145 | 11,0 | 21,0 | 41 | 41 | 8,0 | 30,0 | 20 |
| | 36 | C5036105 | 22,0 | 34,5 | 50 | 50 | 9,0 | 38,0 | 20 | | 36 | C5036145 | 16,0 | 28,0 | 50 | 50 | 9,0 | 38,0 | 20 |
| | 42 | C5042105 | 27,0 | 40,0 | 60 | 60 | 10,0 | 40,0 | 5 | | 42 | C5042145 | 22,0 | 34,0 | 60 | 60 | 10,0 | 40,0 | 5 |
| | 48 DIN | C5049105 | 35,0 | 48,0 | 65 | 65 | 10,0 | 44,0 | 5 | | 48 DIN | C5049145 | 28,0 | 40,0 | 65 | 65 | 10,0 | 44,0 | 5 |
| NPT | 3/8" | C5408105 | 5,0 | 9,5 | 19 | 19 | 15,0 | 38,0 | 50 | NPT RED* | 3/8" | C5408145 | 4,0 | 7,0 | 19 | 19 | 15,0 | 38,0 | 50 |
| | 1/2" | C5412106 | 8,0 | 13,0 | 23 | 22 | 20,0 | 46,0 | 50 | | 1/2" | C5412146 | 5,0 | 10,0 | 23 | 22 | 20,0 | 46,0 | 50 |
| | 3/4" | C5420105 | 9,0 | 16,0 | 29 | 29 | 20,0 | 48,0 | 20 | | 3/4" | C5420145 | 6,0 | 13,0 | 29 | 29 | 20,0 | 48,0 | 20 |
| | 1" | C5428105 | 12,0 | 21,0 | 36 | 36 | 25,0 | 55,0 | 20 | | 1" | C5428145 | 8,0 | 17,0 | 36 | 36 | 25,0 | 55,0 | 20 |
| | 3/8" | C5408145 | 4,0 | 7,0 | 19 | 19 | 15,0 | 38,0 | 50 | | | | | | | | | | |

*RED : Reduced sealing / Garniture réductrice