

ZA type peelable sealing cable gland

Presse étoupe type ZA garniture pelable



OTHER APPLICATIONS

IP PROTECTION :

IP 65 without flat seals

OPERATING TEMPERATURE :

- 40 °C / +60 °C (rubber)
- 25 °C / +100 °C (neoprene)

SPECIAL FEATURES :

- Peelable sealing
- Pressing screw
- Standard sealing

MATERIAL :

- Nickel-plated brass
- Peelable sealing : rubber
- Galvanized steel washer

THREAD :

Metric, PG

CERTIFICATION :

IEC 62 444

ACCESSORIES AVAILABLE :

See accessories

INDICE DE PROTECTION :

IP 65 sans joint de queue

PLAGE DE TEMPÉRATURE :

- 40 °C / +60 °C (caoutchouc)
- 25 °C / +100 °C (néoprène)

AVANTAGES TECHNIQUES :

- Garniture pelable
- Chapeau à bride
- Garniture standard

MATIÈRE :

- Laiton nickelé
- Garniture pelable : caoutchouc
- Rondelle : acier zingué

FILETAGE :


Métrique, PG

CERTIFICATION :

IEC 62 444

ACCESSOIRES DISPONIBLES :

Voir page des accessoires

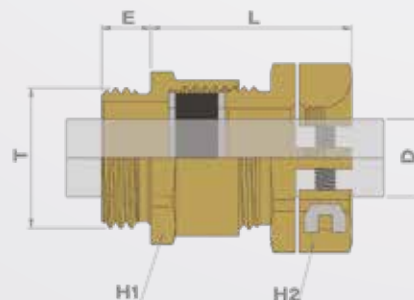

ZA

	Thread T	Part Number		Overall cable diameter D		H1	H2	E	L	Packing
		Rubber	Neoprene	Min	Max					
Metric	12	C8312801	C8312811	4,0	6,0	14	16	7,0	22,0	50
	16	C8316803	C8316813	2,0	9,0	18	19	7,0	27,0	50
	16	C8316802	C8316812	4,0	11,0	20	22	7,0	27,0	50
	16	C8316801	C8316811	4,5	12,0	22	24	7,0	28,0	50
	20	C8320803	C8320813	4,0	11,0	22	22	7,0	27,0	50
	20	C8320802	C8320812	4,5	12,0	22	24	7,0	32,0	50
	20	C8320801	C8320811	5,5	14,5	24	27	7,0	27,0	50
	25	C8325801	C8325811	5,5	14,5	27	27	8,0	32,0	20
	32	C8332802	C8332812	8,0	19,0	34	33	8,5	34,5	20
	32	C8332801	C8332811	12,0	27,0	40	42	8,5	37,5	20
	40	C8340801	C8340811	12,0	27,0	42	42	8,5	36,5	5
	50	C8350802	C8350812	22,0	33,0	52	52	9,5	40,5	10
	50	C8350801	C8350811	25,0	40,0	58	60	9,5	44,5	10
	63	C8363802	C8363812	25,0	40,0	65	60	10,5	44,5	5
	63	C8363801	C8363811	30,0	45,0	65	64	10,5	45,5	5
75	C8375801	C8375811	30,0	45,0	80	64	11,5	44,5	5	
PG	07	C8307002	-	4,0	6,0	14	16	5,0	24,0	50
	09	C8309006	C8309011	2,0	9,0	17	19	6,0	28,0	50
	11	C8311009	C8311011	4,0	11,0	20	22	6,0	29,0	50
	13	C8313003	C8313011	4,5	12,0	22	24	6,5	29,5	50
	16	C8316004	C8316011	5,5	14,5	24	27	6,5	29,5	50
	21	C8321008	C8321011	8,0	19,0	30	33	7,0	35,0	20
	29	C8329004	C8329011	12,0	27,0	40	42	8,0	39,0	20
	36	C8336002	C8336011	22,0	33,0	50	52	9,0	44,0	10
	42	C8342003	C8342011	25,0	40,0	57	60	10,0	55,0	10
	48 DIN	C8349002	C8349011	30,0	45,0	64	64	10,0	58,0	5


PRESSING SCREW WITH TRACTION RELIEF TYPE ZA / CHAPEAU À AMARRAGE TYPE ZA

	Thread T	Part Number	Overall cable diameter D		H	E	L	Packing
			Min	Max				
PG	07	D8307019	5,5	7,5	16	5,5	10,5	50
	09	D8309013	6,5	9,5	19	8,0	11,0	50
	11	D8311016	7,5	11,5	22	8,0	11,0	50
	13	D8313010	8,5	13,5	24	6,5	11,5	50
	16	D8316011	10,5	16,5	27	10,5	12,0	25
	21	D8321015	12,0	20,5	33	10,0	14,0	20
	29	D8329011	19,0	29,5	42	10,0	14,0	10
	36	D8336019	24,0	36,5	52	9,5	16,5	10
	42	D8342010	33,0	42,5	60	18,0	16,5	5
	48 DIN	D8349019	36,0	47,5	64	20,0	17,0	5