



## WADI-A DUPLO cable gland Presse étoupe **WADI-A DUPLO**

**IP PROTECTION :**  
IP 68

**OPERATING TEMPERATURE :**  
-25 °C / +120 °C

**SPECIAL FEATURES :**

- Long multi-holed sealing
- Sealing open

**MATERIAL :**

- Nickel-plated brass
- O-ring : nitrile
- Seal : santoprene

**THREAD :**  
Metric, PG

**CERTIFICATION :**  
IEC 62 444

**ACCESSORIES AVAILABLE :**  
See accessories

**INDICE DE PROTECTION :**  
IP 68

**PLAGE DE TEMPÉRATURE :**  
-25 °C / +120 °C

**AVANTAGES TECHNIQUES :**

- Garniture longue multifilaire
- Garniture ouverte

**MATIÈRE :**


- Laiton nickelé
- Joint torique : nitrile
- Garniture : santoprène

**FILETAGE :**  
Métrique, PG

**CERTIFICATION :**  
IEC 62 444

**ACCESSOIRES DISPONIBLES :**  
Voir page des accessoires

OTHER APPLICATIONS

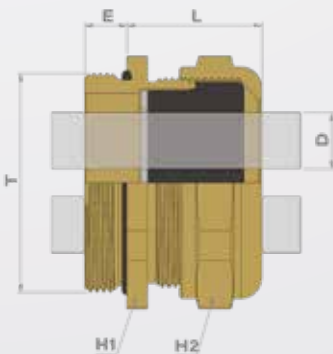

	Thread T	Part Number	Number of entries	Overall cable diameter D		H1	H2	E	L	Packing
				Min	Max					
PG	09	C2809108	2	1,5	2,7	17	17	6,5	17,5	50
	09	C2809110	2	2,3	3,5	17	17	15,0	17,5	50
	11	C2811198	2	6,0	8,0	24	24	6,5	20,5	50
	11	C2811200	2	3,5	5,0	24	24	15,0	20,5	50
	11	C2811218	2	5,0	7,5	24	24	6,5	20,5	50
	11	C2811220	3	3,5	5,0	24	24	15,0	20,5	50
	11	C2811238	2	1,5	2,7	20	17	6,0	18,0	50
	11	C2811250	3	4,0	6,0	24	24	15,0	20,5	50
	11	C2811258	3	4,0	6,0	24	24	6,5	20,5	50
	13	C2813300	2	3,5	5,0	24	24	15,0	21,5	50
	13	C2813310	2	6,0	8,0	24	24	15,0	21,5	50
	13	C2813318	2	6,0	8,0	24	24	6,5	21,5	50
	13	C2813320	3	4,0	6,0	24	24	15,0	21,5	50
	13	C2813338	4	3,5	5,0	24	24	6,5	21,5	50
	13	C2813350	3	3,5	5,0	24	24	15,0	21,5	50
	13	C2813355	3	5,6	6,6	24	24	6,5	21,5	50
	13	C2813378	2	5,5	7,5	24	24	6,5	21,5	50
	16	C2816428	2	7,0	9,0	28	28	6,5	21,5	50
	16	C2816430	3	4,0	6,0	24	24	15,0	21,5	50
	16	C2816448	3	5,0	7,0	24	24	6,5	21,5	50
21	C2821528	3	6,0	9,0	32	32	7,5	22,5	25	
29	C2829638	6	9,0	10,0	46	46	1,8	24,0	10	
Metric	20	C2820000*	-	-	-	24	24	6,5	16,0	50
	20	C2820910	2	3,0	4,0	24	24	6,5	20,5	50
	40	C2840900	11	5,0	6,2	45	45	8,5	26,0	10
	40	C2840901	3	12,0	13,0	45	45	8,5	26,0	10

\* Without sealing / Sans garniture