




## WADI-TEC EMC 360° cable gland

### Presse étoupe WADI-TEC CEM 360°

**IP PROTECTION :**  
IP 68

**OPERATING TEMPERATURE :**  
-30 °C / +120 °C

**SPECIAL FEATURES :**  
 SWB

- Variants sealing : standard, multi-hole, for flat cable
- EMC tested
- Clamping device plastic metallic

**MATERIAL :**

- Nickel-plated brass
- Available in stainless steel 316L-1.4404-V4A
- Seal : TPE
- O-ring : nitrile
- Insert : plastic, brass-plated, tin-plated

**THREAD :**  
Metric, PG

**CERTIFICATION :**  
IEC 62 444

**ACCESSORIES AVAILABLE :**  
See accessories

**INDICE DE PROTECTION :** IP 68

**PLAGE DE TEMPÉRATURE :**  
-30 °C / +120 °C

**AVANTAGES TECHNIQUES :**  
 SWB

- Diverses garnitures : standard, multifilaire, pour câble plat
- Testé CEM
- Griffes de masse plastique métallisée



**MATIÈRE :**

- Laiton nickelé
- Disponible en inox 316L-1.4404-V4A
- Garniture : TPE
- Joint torique : nitrile
- Insert : plastique, cuivré, étamé

**FILETAGE :**  
Métrique, PG

**CERTIFICATION :**  
IEC 62 444

**ACCESSOIRES DISPONIBLES :**  
Voir page des accessoires

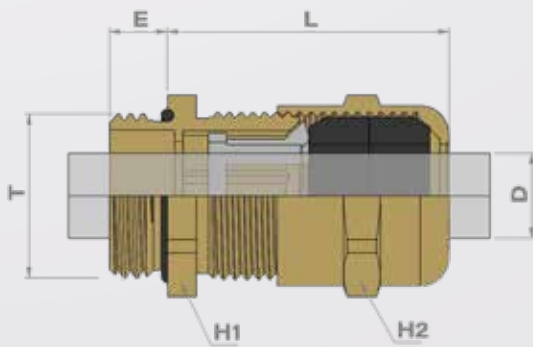

See assembly instruction p. 93  
Voir notice de montage p. 93



	Thread T	Part Number	Overall cable diameter D		H1	H2	E	L	Packing
			Min	Max					
Metric	12	R1221200	4,0	6,5	14	14	7,0	30,0	50
	16S	R1221640	4,0	6,5	17	14	7,0	30,0	50
	16L	R1221600	5,0	8,5	17	17	7,0	31,0	50
	20S	R1222040	7,0	10,5	22	20	7,0	34,0	50
	20L	R1222000	8,0	12,5	22	22	7,0	34,0	50
	25S	R1222540	10,0	14,5	26	24	8,0	34,0	25
	25L	R1222500	13,5	18,0	30	30	8,0	43,0	25
	32S	R1223240	13,5	18,0	33	30	8,5	43,0	20
	32L	R1223200	17,0	24,0	40	40	8,5	52,0	10
	40S	R1224040	17,0	24,0	42	40	8,5	52,0	10
PG	40L	R1224000	24,0	30,0	50	50	8,5	58,5	10
	07	R1200700	4,0	6,5	14	14	5,0	30,0	50
	09	R1200900	5,0	8,5	17	17	6,0	31,0	50
	11S	R1201100	7,0	10,5	20	20	6,0	34,0	50
	11L	R1201301	8,0	12,5	22	22	6,0	34,0	50
	13	R1201300	8,0	12,5	22	22	6,5	33,5	50
	16	R1201600	10,0	14,5	24	24	7,0	33,5	20
	21	R1202100	13,5	18,0	30	30	7,0	43,0	20
29	R1202900	17,0	24,0	40	40	8,0	52,0	10	
36	R1203600	24,0	30,0	50	50	9,0	61,0	10	

	Thread T	Part Number	E	Packing	Locknuts
16S	R1231640	13,0	50	D3416100	
16L	R1231600	13,0	50	D3416100	
20S	R1232040	13,0	50	D3420100	
20L	R1232000	13,0	50	D3420100	
25S	R1232540	14,0	20	D3425100	
25L	R1232500	14,0	20	D3425100	
32S	R1233240	14,5	20	D3432100	
32L	R1233200	14,5	20	D3432100	
40S	R1234040	14,5	10	D3440100	
40L	R1234000	14,5	10	D3440100	